

Cod.1098/410P

10 CH, S+265 NVR, 8M, 8 PoE ports, 1HDD slot

TECHNICAL FEATURES

HD Input

- Plug and play
- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 10-channel input
- 8 PoE ports
- Supports live view, storage, and playback of the connected camera at up to 8MP resolution

HD Output

- 1xHDMI and 1xVGA simultaneous outputs
- HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- 1 SATA interfaces, up to 10TB for each HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 1xRJ45 self-adaptive 10/100 Mbps network interface
- PoE Port: 8xRJ45 self-adaptive 10/100 Mbps network interfaces

Various Applications


- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- Connectable to smart IP cameras and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade
- Support 250m long-distance transmission




Input	
Video Input	10-ch
Max Resolution	8MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 80Mbps; Outgoing 80Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800 VGA 1-ch, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800
Screen Split	1/3/4/6/8/9/10
Audio Output	1x RCA
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	8MP/6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	1x 8MP, 1x 6MP, 1x 5MP, 2x 4MP, 2x 3MP, 4x 1080P, 8x 720P, 10x 4CIF
Synchronous Playback	1x 8MP, 1x 6MP, 1x 5MP, 2x 4MP, 2x 3MP, 4x 1080P, 8x 720P
Records Encryption	Yes
Hard Disk	
SATA	1 SATA interfaces for 1 HDD
Capacity	Up to 10TB for each HDD
eSATA Interface	N/A
Array Type	N/A
External Interface	
Network Interface	1x RJ45 self-adaptive 10/100/1000 Mbps network interface
USB Interface	2x USB 2.0
Serial Interface	N/A
Alarm In/Out	4/1
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P
POE	
POE Interface	8x RJ45 self-adaptive 10/100 Mbps network interface
Power per POE Port	30W
Max Current per POE Port	600mA
General	
Web Version	Web6
Language	Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic
Operating Conditions	-10°C ~ 55°C , 10%~90% RH
Power Supply	DC48V
Consumption (without HDD)	≤20W (without HDD)
Chassis	1U
Dimensions	45.1×255×231mm
Weight (without HDD)	1Kg

1098/410P 10 CH, S+265 NVR, 8M, 8 PoE ports, 1HDD slot

DIMENSIONS (mm)

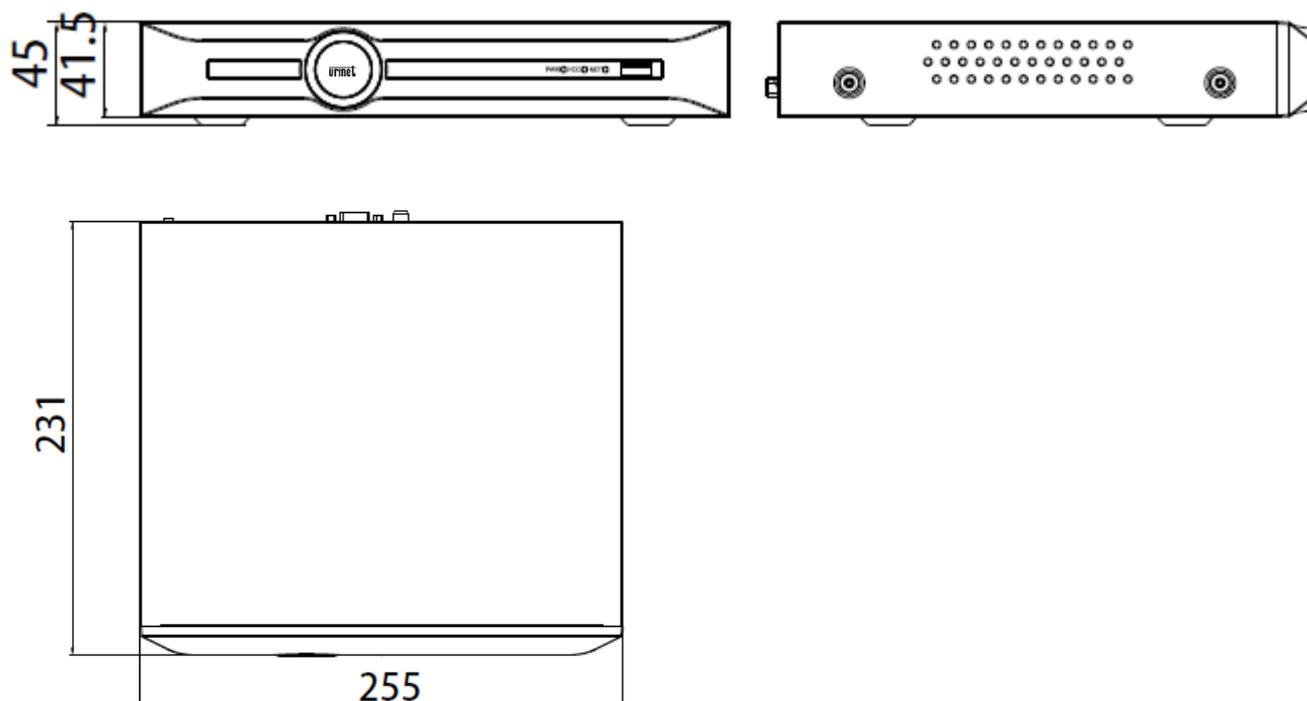

Physical Interfaces

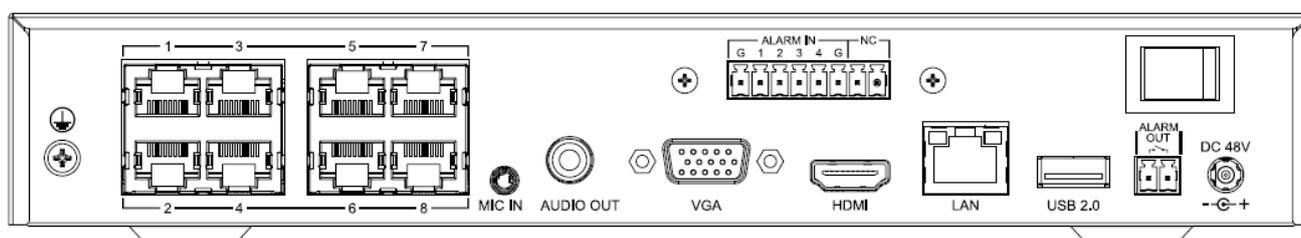

Technical specifications are subject to changes without notice.

Urmet S.p.A. | Via Bologna, 188/C | 10154 TORINO (ITALY)

T +39 011.24.00.000

info@urmet.com | **urmet.com**

CUSTOMER SERVICE +39 011.23.39.810