



Cod.1098/458

80 CH, H.265 NVR, 12M, 16HDD slot

TECHNICAL FEATURES

HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Up to 80 IP cameras can be connected
- Supports live view, storage, and playback of the connected camera at up to 12MP resolution

HD Output

- HDMI and VGA independent outputs
- HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- 16 SATA interfaces connectable for recording and backup on the front panel, up to 10TB for each HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 2 self-adaptive 10/100/1000 Mbps network interfaces




Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- VCA detection alarm is supported
- Smart search for the selected area in the video and smart playback to improve the playback efficiency
- Web6 supports plug-in-free browsing and can preview videos on all browsers


Input	
Video Input	80-ch
Max Resolution	12MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 320Mbps; Outgoing 320Mbps
Output	
HDMI/VGA Output	HDMI 2-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600 VGA 2-ch, 1920×1080, 1440×900, 1366×768, 1280×800, 1280×720, 1024×768, 800×600
Screen Split	1/3/4/6/8/9/10/13/16/20A/20B/25/36/40/64
Audio Output	1x3.5mm, 1x BNC
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	2x12MP, 4x8MP, 4x6MP, 5x5MP, 8x4MP, 9x3MP, 16x1080P, 32x720P, 64x4CIF
Synchronous Playback	2x12MP, 4x8MP, 4x6MP, 5x5MP, 8x4MP, 9x3MP, 16x1080P, 16x720P
Records Encryption	Yes
Hard Disk	
SATA	16 SATA interfaces for 16 HDDs
Capacity	Up to 10TB for each HDD
eSATA Interface	1 eSATA interface
Array Type	JBOD, RAID 0/1/5/6/10
External Interface	
Network Interface	2xRJ45 self-adaptive 10/100/1000 Mbps network interfaces
USB Interface	2xUSB 2.0, 1x USB 3.0
Serial Interface	2xRS-485, 1x RS-232
Alarm In/Out	16/4
Network	
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
System Compatibility	ONVIF (PROFILE S/T), SDK, P2P
General	
Web Version	WEB6
Language	Simple Chinese, Traditional Chinese, English, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Polish, Dutch, Hebraism, Arabic (only for UI)
Operating Conditions	-10° C ~55°C, 10%~90% RH
Power Supply	AC100~240V, 50/60HZ
Redundant Power	N/A
Consumption (without HDD)	100W (without HDD)
Chassis	3U
Dimensions	132×482.6×490mm
Weight (without HDD)	11.35Kg

1098/458 80 CH, H.265 NVR, 12M, 16HDD slot

DIMENSIONS (mm)

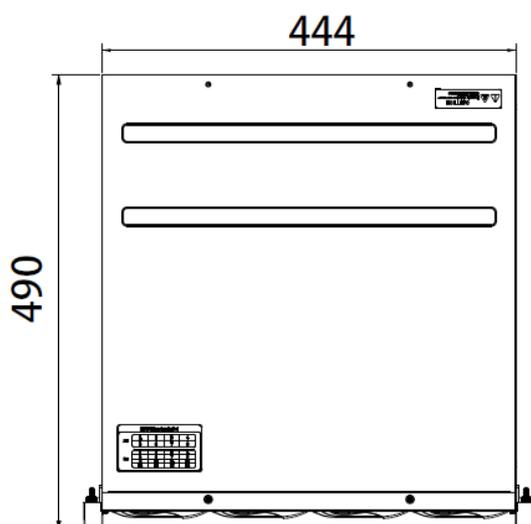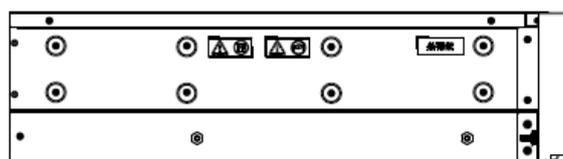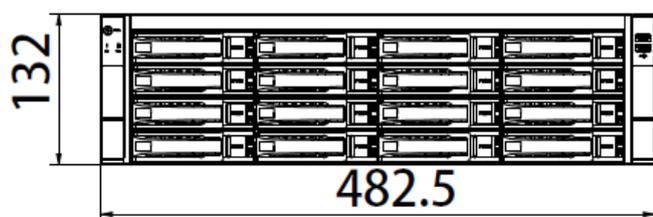

Physical Interfaces

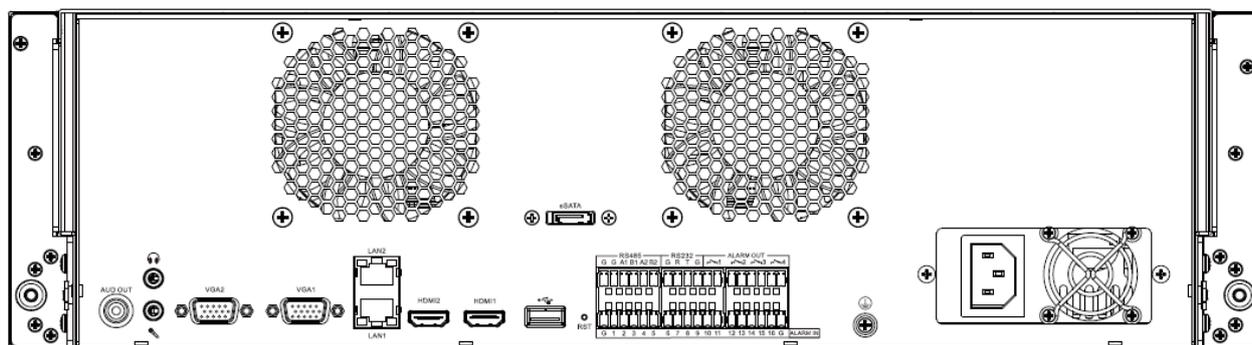

Technical specifications are subject to changes without notice.

Urmet S.p.A. | Via Bologna, 188/C | 10154 TORINO (ITALY)

T +39 011.24.00.000

info@urmet.com | urmet.com

CUSTOMER SERVICE +39 011.23.39.810